




Floor Mount Box Support Assemblies

Floor Mount/Single-Side Box Support Combo Available For Multiple Box Applications

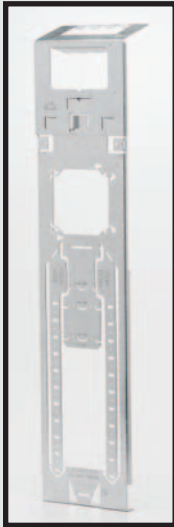

BBF18C



BBFC

Patent #
5595362
and
Patent
Pending


Features

- New BBF series floor stands provide the most rigid support in the industry.
- Far-side support accommodates 6", 5 1/2", 3 1/2" and 2 1/2" stud depths.
- Integral wings provide rigid support when mounted between studs.
- Fold-out tab built in to attach floor stand to the stud if desired.
- Bottom kick plate depth shortened to slide under stud plate more easily.
- Optional cable containment clip can be ordered pre-installed or field attached without hardware.
- BB4 series bracket can be mounted to the side of the floor-stand for multiple box applications.
- Patented Marty-Mouse™ ears enable boxes to be secured in place with or without plaster rings.
- Available in three (3) bracket heights - 15", 18" and 24".

UPC/Part Number	Catalog Number	Description	Box Qty.
782051 52944	BBF15	15" Floor-Mount Box Support	25
782051 52948	BBF15C	15" Floor-Mount Box Support w/Cable Containment	25
782051 52945	BBF18	18" Floor-Mount Box Support	25
782051 52949	BBF18C	18" Floor-Mount Box Support w/Cable Containment	25
782051 52946	BBF24	24" Floor-Mount Box Support	25
782051 52950	BBF24C	24" Floor-Mount Box Support w/Cable Containment	25
782051 52947	BBFC	Cable Containment for Floor-Mount Box Support	25

The New Floor Stand is available in various options for the Ruff-In Pre-Fab product family:

Option 1

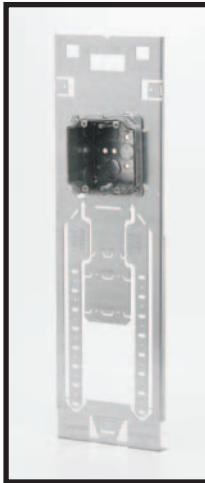


Floor stand Ruff-IN assembly with choice of box, plaster ring, connectors and/or wiring devices



Options 1 and 2 are also available with cable containment bracket included in the assembly



Option 2

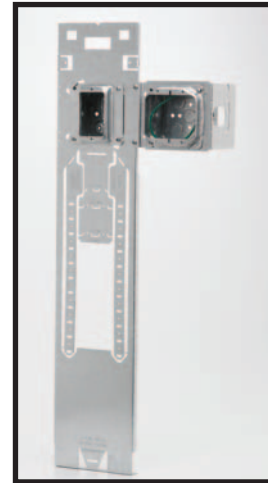

Floor stand and Ruff-IN assembly with optional second box and choice of box, plaster ring, connectors and/or wiring devices

Phone: 800-851-7415 • www.cooperbline.com

Advantage Flyer • Fasteners

COOPER B-Line

BBF18 C - 3 3 10 4D A - - - - - P - - - - -



Step 1 - Basic Ruff-In

1 Box Height

- BBF15 = 15"
- BBF18 = 18"
- BBF24 = 24"

2 Cable Containment

- C = Include Cable Containment
- Blank = Do not include Cable Containment

3 Stud Depth for Optional Second Box

- Blank = No additional bracket
- 3 = 3 1/2" & 2 1/2"
- 4 = 4", 3 1/2" & 2 1/2"
- 5 = 6", 5 1/2" 3 1/2" & 2 1/2"

4 Plaster Ring Style

- 1 = One Device
- 2 = Two Device
- R = Round
- 1AJ = One Device Adjustable *
- 2AJ = Two Device Adjustable *
- Blank = Box Only

5 Plaster Ring Size

- 04 = 1/4" Raise
- 08 = 1/2" Raise
- 10 = 5/8" Raise
- 12 = 3/4" Raise
- 16 = 1" Raise
- 20 = 1 1/4" Raise
- 24 = 1 1/2" Raise
- 32 = 2" Raise
- Blank = Box Only or Adjustable Plaster Ring

* One device adjustable plaster rings are set at 3/4" raise and can be adjusted to 1 1/2" raise. Two device adjustable plaster rings are set at 5/8" raise and can be adjusted to 1 1/2" raise. Adjustable plaster ring can only be used on 4" square boxes.

Step 1 - Basic Ruff-In (cont.)

6 Box Style

- 4D = 4" Sq., 2 1/8" Deep
- 436 = 4" Sq., 2 1/8" Deep, 1" KO
- 4 = 4" Sq., 1 1/2" Deep
- 432 = 4" Sq., 2 1/8" Deep, 3/4" KO
- 5D = 4 11/16" Sq., 2 1/8" Deep
- 560 = 4 11/16" Sq., 2 1/8" Deep, 1" KO
- 5 = 4 11/16" Sq., 1 1/2" Deep
- 554 = 4 11/16" Sq., 2 1/8" Deep, 3/4" KO

7 Ground Wire

(Pre-installed devices require stranded wire)

- Blank = Solid Ground Wire
- A = Stranded Ground Wire
- N = No Ground Wire

8 Firestop Pad

- Blank = No Pad
- F = Pad Installed

Step 2 - Connectors

9 Connector Top Left KO

- Blank = No Attachment
- L = Attachment Present

10 Connector Type

- Blank = None
- A = QLK50S (1/2" single MC)
- B = QLK50D (1/2" double MC)
- C = QLK75 (3/4" single MC)
- D = SSBC50 (1/2" EMT Connector)
- E = SSBC75 (3/4" EMT Connector)
- F = SSBC100 (1" EMT Connector)

11 Connector Top Middle KO

- Blank = No Attachment
- M = Attachment Present

12 Connector Top Right KO

- Blank = No Attachment
- R = Attachment Present

Step 3 - Wiring Devices


13 Wire Configuration

- P = Pigtails w/4 Hole Wago (all receptacles installed w/ground up)
- R = Pigtails w/4 Hole Wagos (all receptacles installed w/ground down)
- W = No Pigtails Wires Contained Inside Box (all receptacles installed w/ground up)
- Y = No Pigtails Wires Contained Inside Box (all receptacles installed w/ground down)
- M = Pigtails w/ Bare Wire Ends extending from top KOs, Twist-On Wire Connectors Inside Box (all receptacles installed w/ground up)
- N = Pigtails w/ Bare Wire Ends extending from top KOs, Twist-On Wire Connectors Inside Box (all receptacles installed w/ground down)

Note: P, R, M and N configurations not available if KO connectors are installed on the outlet box

14 Device Type

For wiring device assemblies, refer to Ruff-IN Brochure (BLFRI-08R)

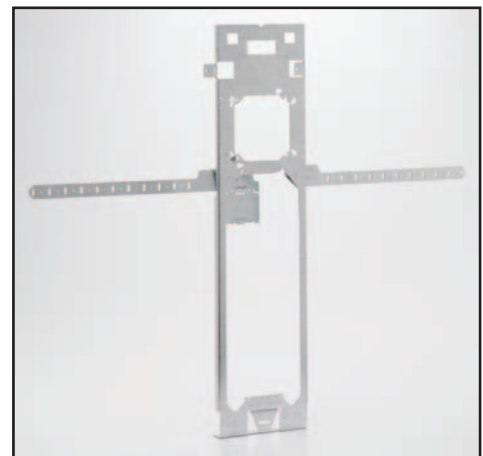

BBF18 with arms bent out

- Basic Ruff-IN = 3-5 day lead-time for quantities of 1000 or less.
- Ruff-IN with Wiring Devices = 10-15 day lead-time for quantities of 500 or less.
- Non Stock Components = Call factory for lead-time.